



6 Lake Street
 PO Box 1436
 Lawrence, MA
 USA 01841

Telephone (617) 681-0392 • TeleFax (617) 681-9135 • Telex 928377

GOLD BONDED DIODES

TYPE 1N270

- FEATURES**
- Low forward voltage drop**
—low power consumption
 - Thirty years of proven reliability**
—one million hours mean time between failures (MTBF)
 - Very low noise level**
 - Metallurgically bonded**


ABSOLUTE MAXIMUM RATINGS

Peak Inverse Voltage	100V	@ 25 °C
Peak Forward Current	500mA	unless
Operating Temperature Range	-65°C to 85°C	otherwise
Average Power Dissipation	80mW	specified

ELECTRICAL CHARACTERISTICS


	Symbol	Conditions	Min.	Max.	Unit	T °C
Peak Inverse Voltage	PIV	1mA	100		V	25°
Reverse Current	I _r	50V		100	uA	25°
Forward Voltage	V _f	200mA		1.0	V	25°

MECHANICAL

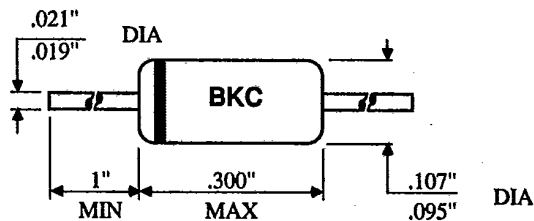


Passes all mechanical and environmental requirements of MIL-S-19500, including shock and vibration.


Low Current Forward Turn On

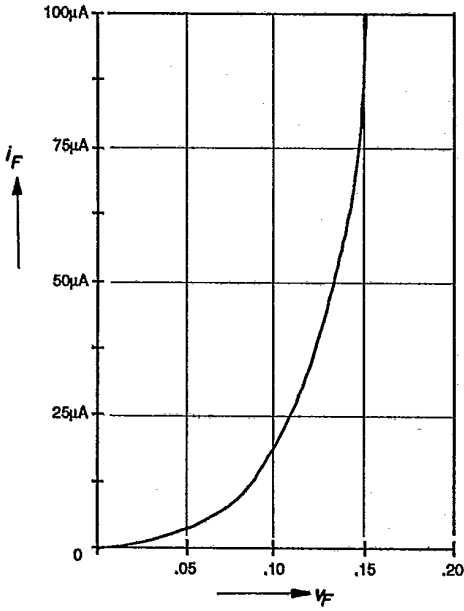


Foward Characteristic

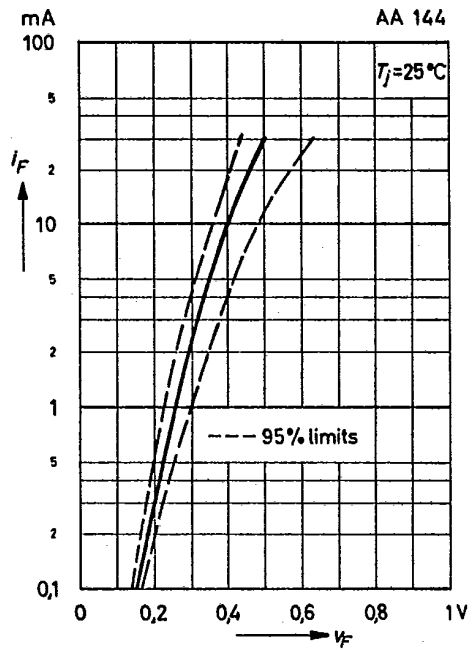

Reverse Characteristic

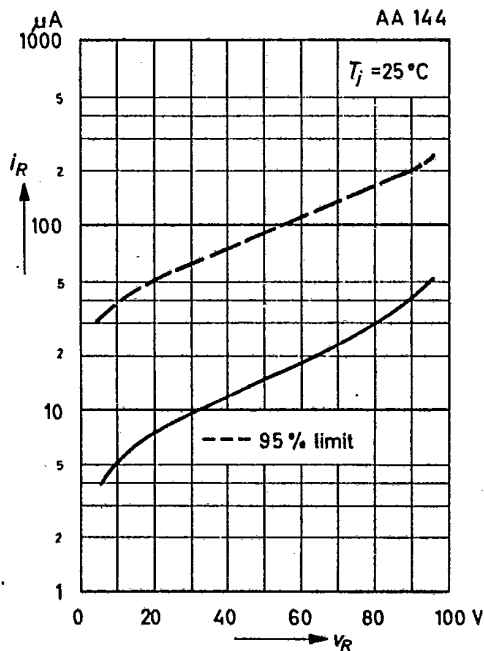

Rectification Current Versus Peak Inverse Voltage at Half Wave Rectification and Resistive Load

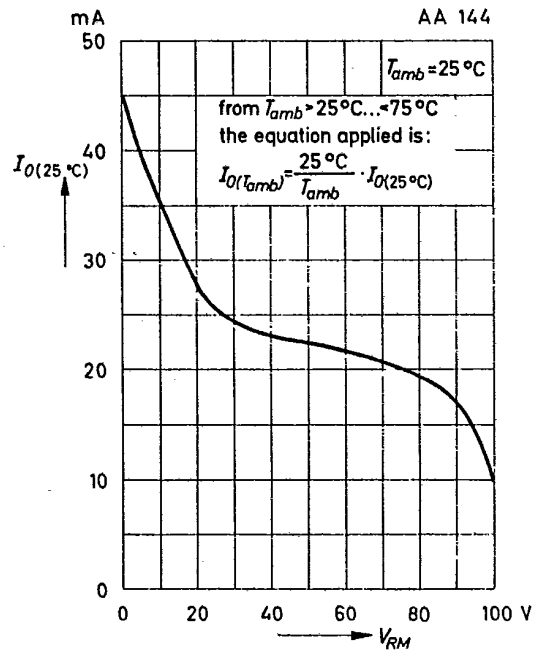

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.